



NSCET E-LEARNING PRESENTATION

LISTEN ... LEARN... LEAD...






Electrical and Electronics Engineering


III YEAR/5th Semester

CS8392-OBJECT ORIENTED PROGRAMMING

**M.Gayathri B.Tech.,M.E.,
Assistant Professor**


**Nadar Saraswathi College of Engineering & Technology,
Vadapudupatti, Annanji (po), Theni – 625531.**

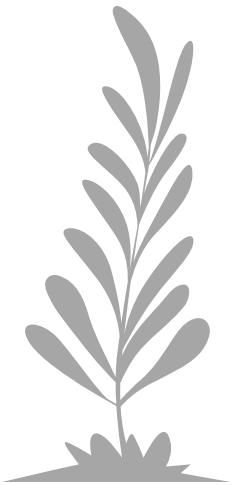

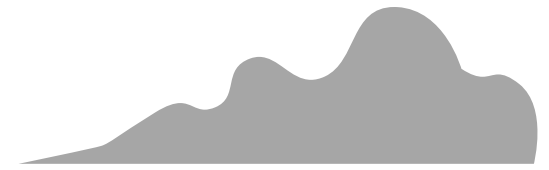

UNIT-II INHERITANCE AND INTERFACES



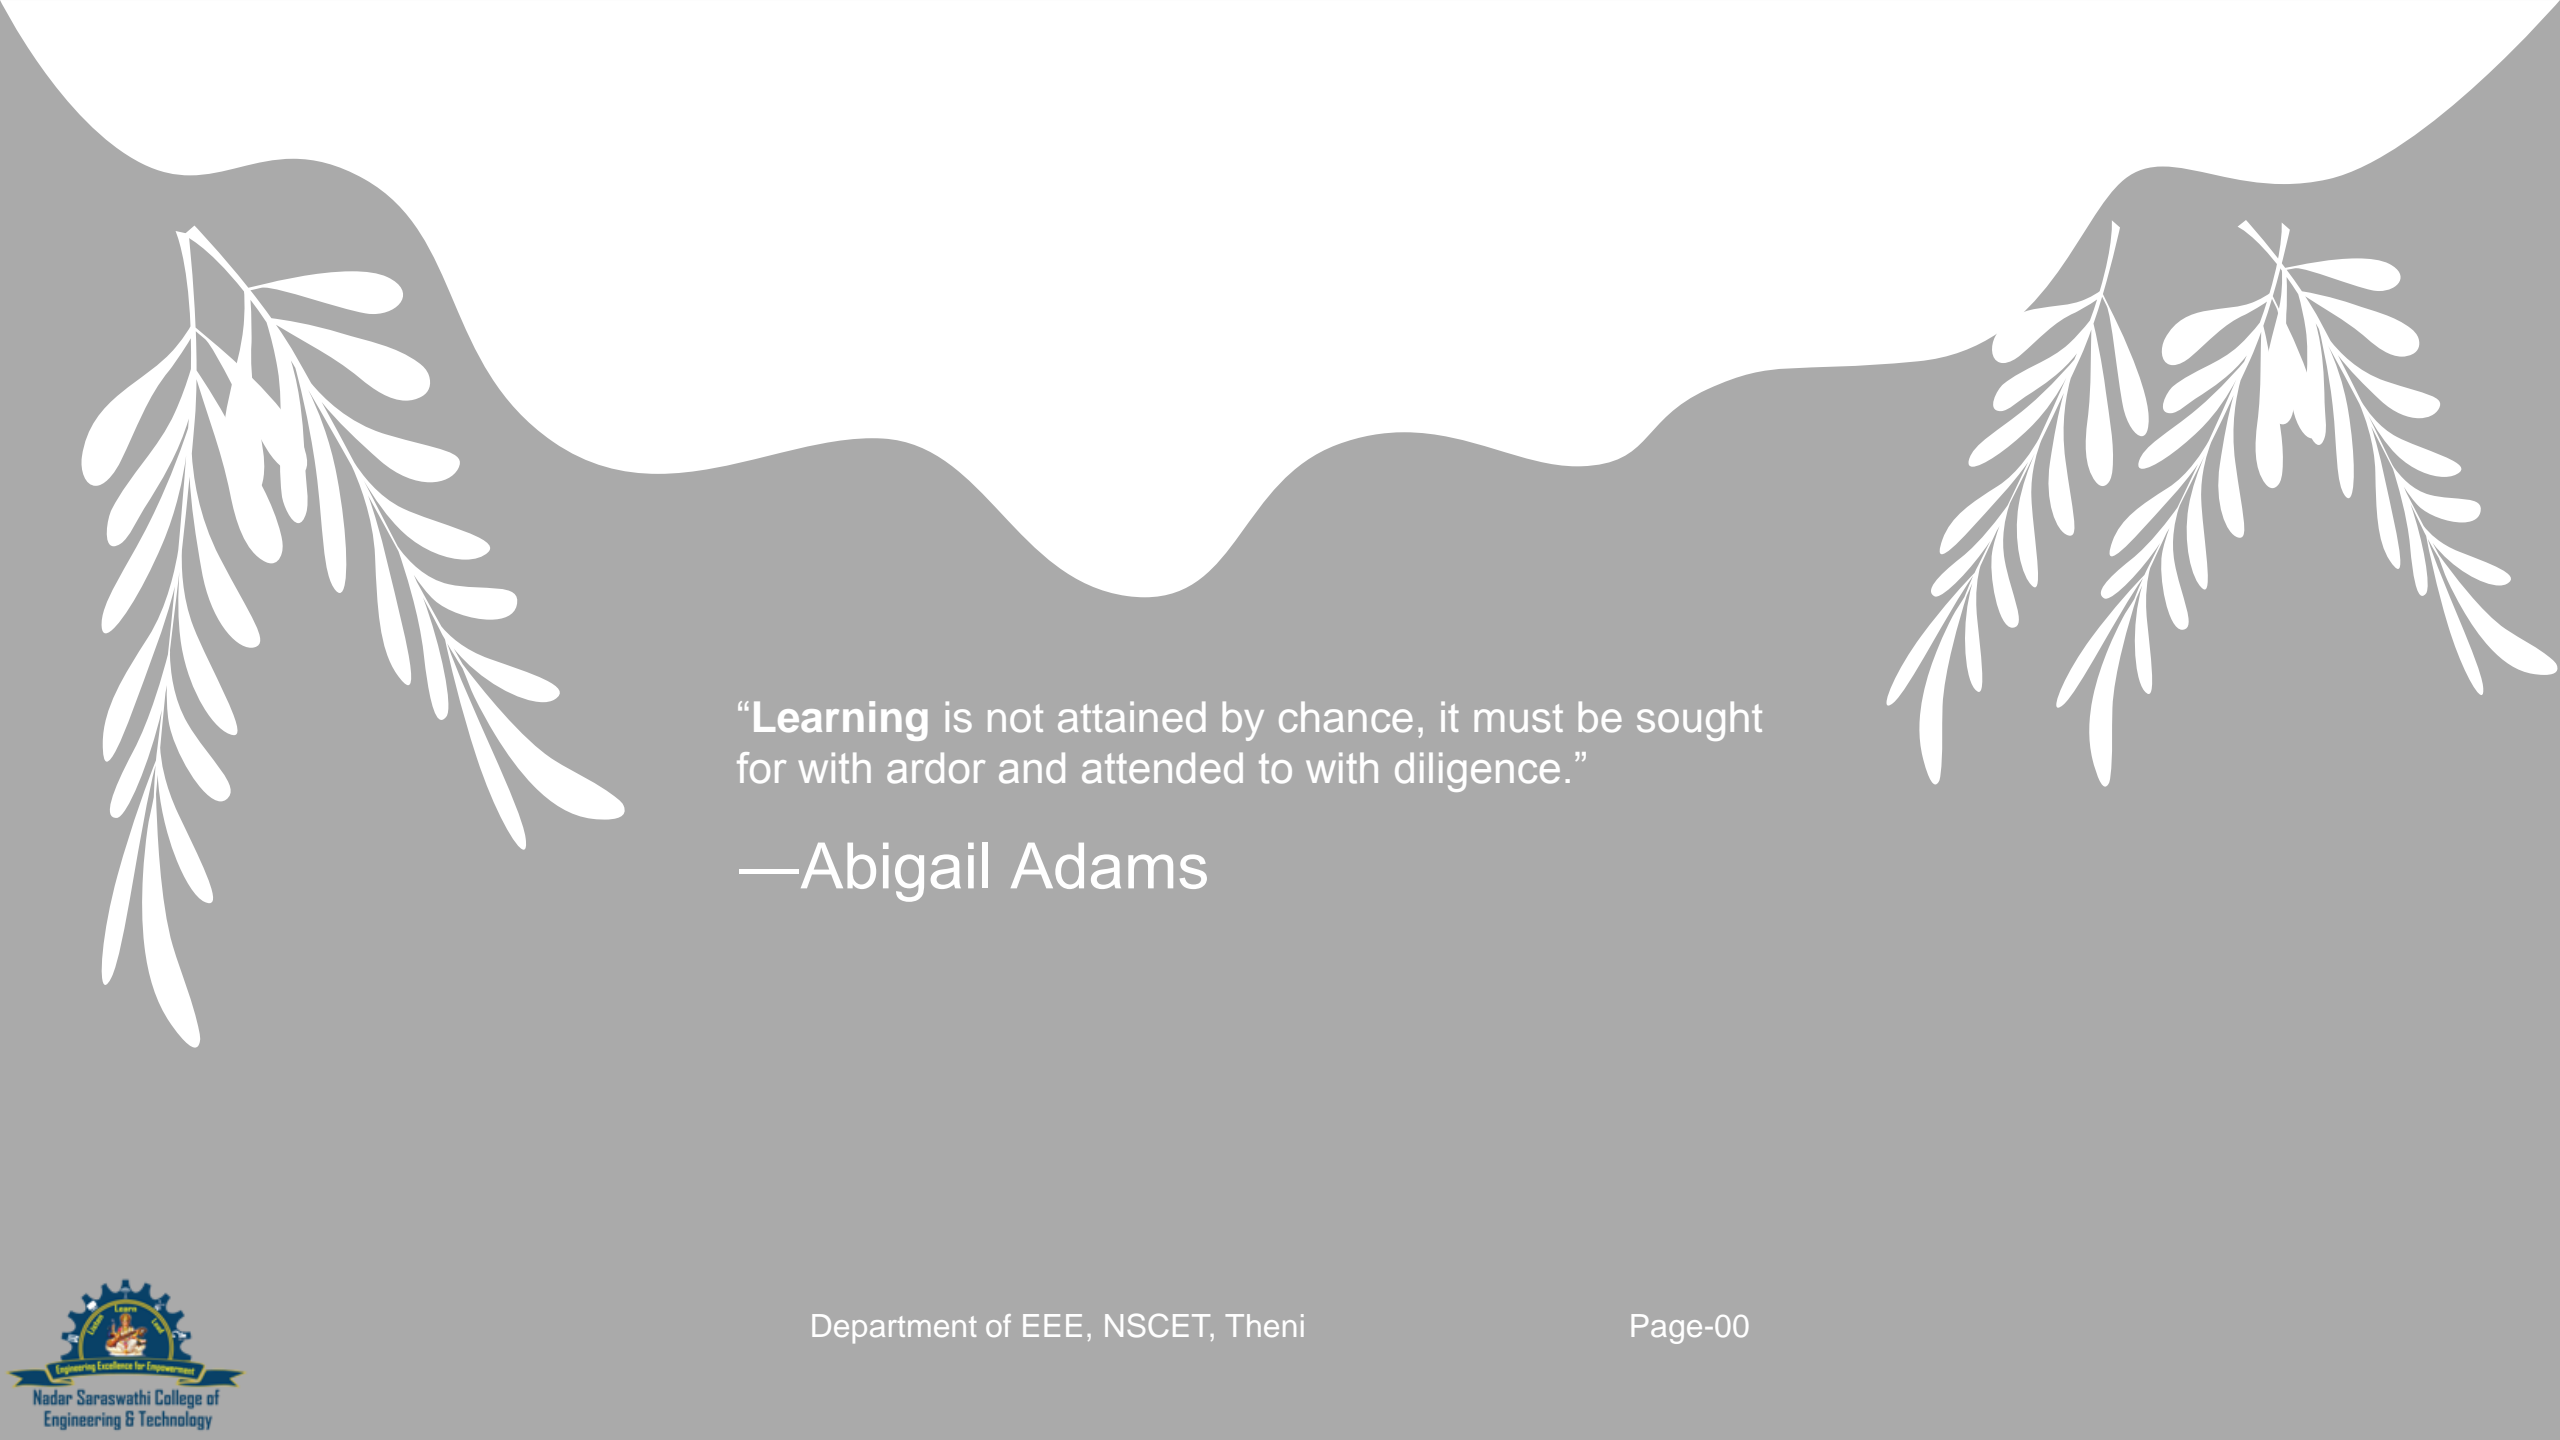

“**Learning** is not attained by chance, it must be sought for with ardor and attended to with diligence.”

—Abigail Adams

Unit II - Syllabus

INHERITANCE AND INTERFACES

- Inheritance – Super classes- sub classes –Protected members – constructors in sub classes- the Object class – abstract classes and methods- final methods and classes – Interfaces – defining an interface, implementing interface, differences between classes and interfaces and extending interfaces - Object cloning -inner classes, Array Lists - Strings

Inheritance

Inheritance is the mechanism in java by which one class is allow to inherit the features (fields and methods) of another class. It is process of deriving a new class from an existing class. A class that is inherited is called a *superclass and the class that does the inheriting is called a subclass.*

Inheritance represents the IS-A relationship, also known as parent-child relationship. The keyword used for inheritance is extends.

Contd.,

Syntax:

```
class Subclass-name extends Superclass-name
```

```
{
```

```
//methods and fields
```

```
}
```

Here, the extends keyword indicates that we are creating a new class that derives from an existing class.

Advantages of Inheritance:

- Code reusability - public methods of base class can be reused in derived classes
- Data hiding – private data of base class cannot be altered by derived class
- Overriding--With inheritance, we will be able to override the methods of the base class in the derived class

Example:

```
// Create a superclass.
```

```
class BaseClass{
```

```
int a=10,b=20;
```

```
public void add(){
```

```
System.out.println("Sum:"+(a+b));
```



```
} }  
// Create a subclass by extending class BaseClass.  
public class Main extends BaseClass  
{  
public void sub(){  
System.out.println("Difference:"+(a-b));  
}  
public static void main(String[] args) {  
Main obj=new Main();  
/*The subclass has access to all public members of its superclass*/  
obj.add();  
obj.sub();  
} }
```

Sample Output:
Sum:30
Difference:-10

Types of inheritances

Single Inheritance :


In single inheritance, a subclass inherit the features of one superclass.

Example:


```
class Shape{  
int a=10,b=20;  
}  
class Rectangle extends Shape{  
public void rectArea(){  
System.out.println("Rectangle Area:"+(a*b));
```

```
}  
  
public class Main  
{  
    public static void main(String[] args) {  
        Rectangle obj=new Rectangle();  
        obj.rectArea();  
    }  
}}
```


Inheritance Types




Single Inheritance

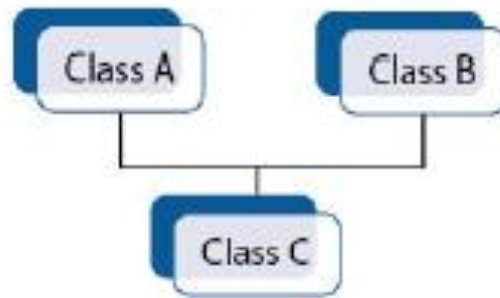


Multiple Inheritance

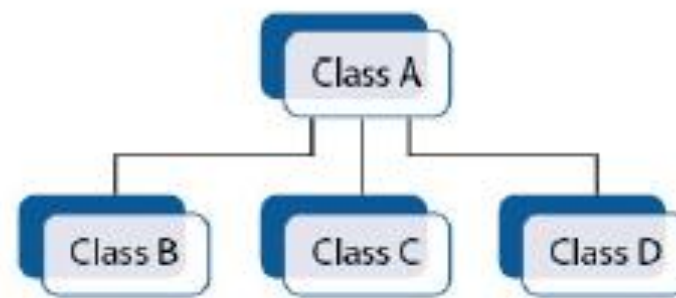

Hierarchical Inheritance

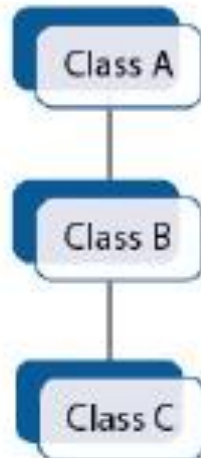

Multilevel Inheritance

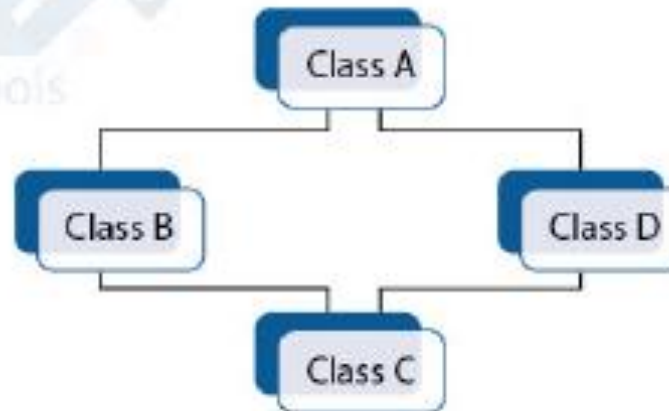

Hybrid Inheritance



Multilevel Inheritance:

In Multilevel Inheritance, a derived class will be inheriting a base class and as well as the derived class also act as the base class to other class i.e. a derived class in turn acts as a base class for another class.

Example:

```
class Numbers{
int a=10,b=20;
}
class Add2 extends Numbers{
int c=30;
public void sum2(){
System.out.println("Sum of 2 nos.:"+(a+b));
} }
```

```
class Add3 extends Add2{

public void sum3(){

System.out.println(“Sum of 3 nos.”+(a+b+c));

}

}

public class Main

{

public static void main(String[] args) {

Add3 obj=new Add3();

obj.sum2();

obj.sum3();

}

}
```

Sample Output:

Sum of 2 nos.:30

Sum of 3 nos.:60

Hierarchical Inheritance:

In Hierarchical Inheritance, one class serves as a superclass (base class) for more than one sub class.

Example:

```
class Shape{  
  
int a=10,b=20;  
  
}  
  
class Rectangle extends Shape{  
public void rectArea(){  
System.out.println("Rectangle Area:"+(a*b));  
}  
}
```

```
class Triangle extends Shape{
public void triArea(){
System.out.println("Triangle Area:"+(0.5*a*b));
}
}

public class Main
{
public static void main(String[] args) {
Rectangle obj=new Rectangle();
obj.rectArea();
Triangle obj1=new Triangle();
obj1.triArea();
}
}
```

Sample Output:

Rectangle Area:200

Triangle Area:100.0

Multiple inheritance

Java does not allow multiple inheritance:

- To reduce the complexity and simplify the language
- To avoid the ambiguity caused by multiple inheritance

For example, Consider a class C derived from two base classes A and B. Class C inherits A and B features. If A and B have a method with same signature, there will be ambiguity to call method of A or B class. It will result in compile time error.

```
class A{  
  
void msg(){System.out.println("Class A");}  
  
}
```

```
class B{  
  
void msg(){System.out.println("Class B ");}  
  
}  
  
class C extends A,B{//suppose if it were  
  
Public Static void main(String args[]){  
  
C obj=new C();  
  
obj.msg();//Now which msg() method would be invoked?  
  
}  
  
}
```

Sample Output:

Compile time error

Access Control in Inheritance

The following rules for inherited methods are enforced –

- Variables declared public or protected in a superclass are inheritable in subclasses.
- Variables or Methods declared private in a superclass are not inherited at all.
- Methods declared public in a superclass also must be public in all subclasses.
- Methods declared protected in a superclass must either be protected or public in subclasses; they cannot be private.

Example:

```
// Create a superclass
```

```
class A{
```

```
int x; // default specifier
```

```
private int y; // private to A
```

```
public void set_xy(int a,int b){
```

```
    x=a;
```

```
    y=b;
```

```
}
```

```
}
```

```
// A's y is not accessible here.
```

```
class B extends A{
```

```
public void add(){
```

```
System.out.println("Sum:"+(x+y)); //Error: y has private access in A – not inheritable
```

```
} }
```

```
class Main{
```

```
public static void main(String args[]){
```

```
B obj=new B();
```

```
obj.set_xy(10,20);
```

```
obj.add();
```

```
} }
```

In this example since y is declared as private, it is only accessible by its own class members.

Subclasses have no access to it.

Using Super

The super keyword refers to immediate parent class object. Whenever you create the instance of subclass, an instance of parent class is created implicitly which is referred by super reference variable.

- It can be used to refer immediate parent class instance variable when both parent and child class have member with same name
- It can be used to invoke immediate parent class method when child class has overridden that method.
- super() can be used to invoke immediate parent class constructor.

Use of super with variables:

When both parent and child class have member with same name, we can use super keyword to access member of parent class.

Example:

```
class SuperCls{
```

```
int x = 20;
```

```
}
```

```
/* sub class SubCls extending SuperCls */
```

```
class SubCls extends SuperCls{
```

```
int x = 80;
```

```
void display() {
```

```
System.out.println("Super Class x: " + super.x); //print x of super class
```

```
System.out.println("Sub Class x: " + x); //print x of subclass
```

```
} }
```

```
/* Driver program to test */
```

```
class Main {
```

```
public static void main(String[] args) {
```

```
SubCls obj = new SubCls();
```

```
obj.display();
```

```
} }
```

In the above example, both base class and subclass have a member x. We could access x of base class in subclass using super keyword.

Sample Output:

Super Class x: 20

Sub Class x: 80

Use of super with methods:

The super keyword can also be used to invoke parent class method. It should be used if subclass contains the same method as parent class (Method Overriding).

```
class SuperCls {  
  
int x = 20;  
  
void display(){ //display() in super class  
  
System.out.println("Super Class x: " + x);  
  
} }  
  
/* sub class SubCls extending SuperCls */  
  
class SubCls extends SuperCls{  
  
int x = 80;
```

```
void display() { //display() redefined in sub class – method overriding
```

```
System.out.println(“Sub Class x: “ + x);
```

```
super.display(); // invoke super class display()
```

```
} }
```

```
/* Driver program to test */
```

```
class Main{
```

```
public static void main(String[] args){
```

```
SubCls obj = new SubCls();
```

```
obj.display();
```

```
} }
```

Sample Output:

Sub Class x: 80

Super Class x: 20

In the above example, if we only call method display() then, the display() of sub class gets invoked. But with the use of super keyword, display() of superclass could also be invoked.

Use of super with constructors:

The super keyword can also be used to invoke the parent class constructor.

Syntax:

```
super();
```

- super() if present, must always be the first statement executed inside a subclass constructor.

- When we invoke a super() statement from within a subclass constructor, we are invoking the immediate super class constructor

Example:

```
class SuperCls{  
  
    SuperCls(){  
  
        System.out.println("In Super Constructor");  
  
    } }  
  
/* sub class SubCls extending SuperCls */  
class SubCls extends SuperCls  
{  
  
    SubCls(){  
  
        super();  
  
        System.out.println("In Sub Constructor");  
  
    }  
  
}
```

```
/* Driver program to test */
```

```
class Main
```

```
{
```

```
public static void main(String[] args)
```

```
{
```

```
SubCls obj = new SubCls();
```

```
}
```

```
}
```

Sample Output:

In Super Constructor

In Sub Constructor

Order of Constructor Invocation

- Constructors are invoked in the order of their derivation
- If a subclass constructor does not explicitly invoke a superclass constructor using `super()` in the first line, the Java compiler automatically inserts a call to the noargument constructor of the superclass. If the superclass does not have a no-argument constructor, it will generate a compile-time error.

Example:

```
class A
{
A(){
System.out.println("A's Constructor");
}
}
```

```
/* sub class B extending A */  
  
class B extends A{  
  
B(){  
  
super();  
  
System.out.println("B's Constructor");  
  
}}
```

```
/* sub class C extending B */  
  
class C extends B{  
  
C(){  
  
super();
```

```
System.out.println("C's Constructor");  
  
} }  
  
/* Driver program to test */  
  
class Main {  
  
public static void main(String[] args) {  
  
C obj = new C();  
  
} }  

```


Sample Output:
A's Constructor
B's Constructor
C's Constructor

The Object Class

The Object class is the parent class of all the classes in java by default (directly or indirectly).

The `java.lang.Object` class is the root of the class hierarchy. Some of the Object classes are Boolean, Math, Number, String etc.

Object class Hierarchy

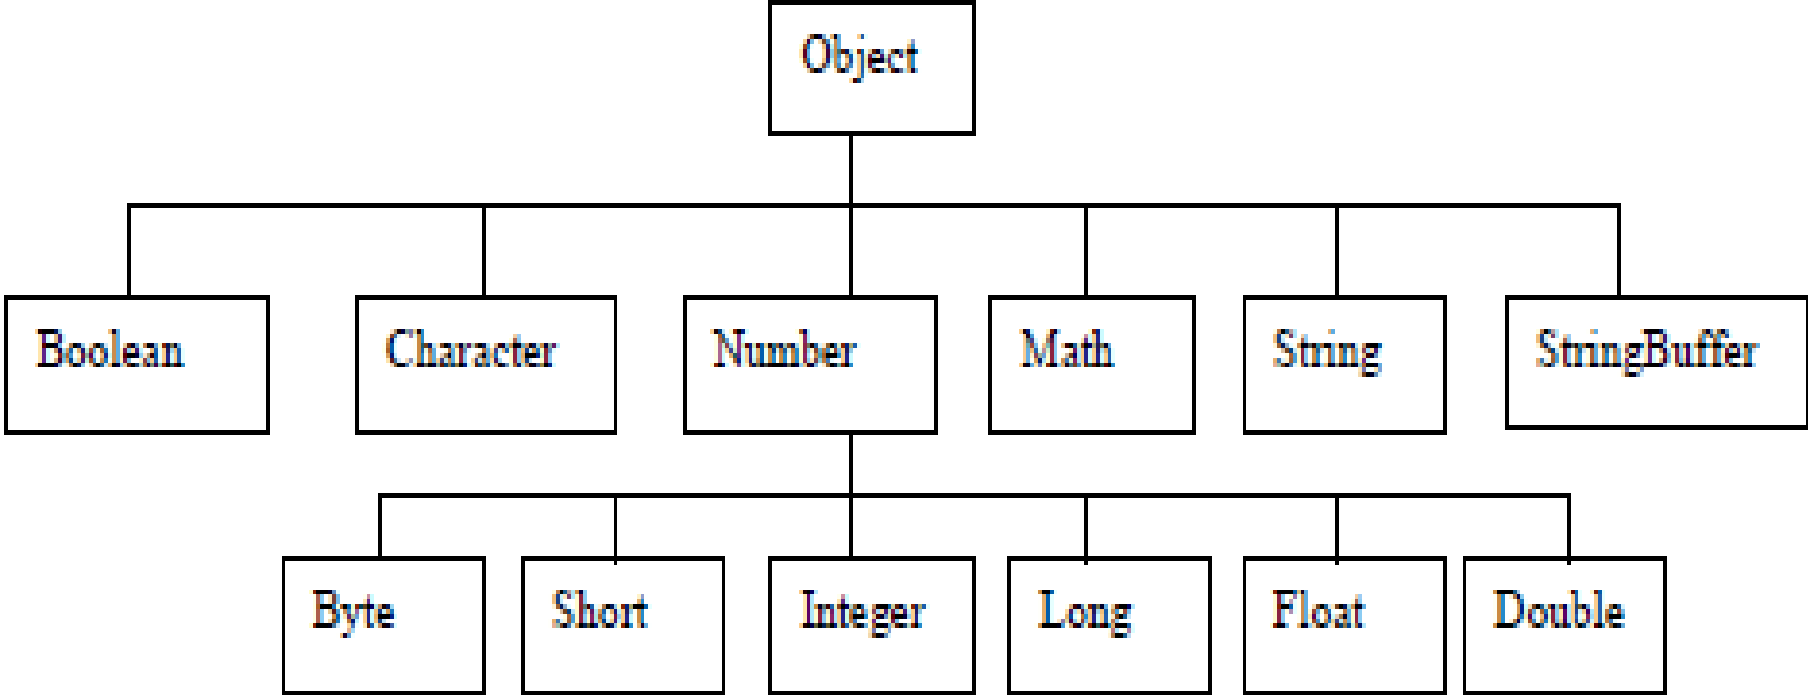

Some of the important methods defined in Object class are listed below.

Object class Methods	Description
<code>boolean equals(Object)</code>	Returns true if two references point to the same object.
<code>String toString()</code>	Converts object to String
<code>void notify()</code> <code>void notifyAll()</code> <code>void wait()</code>	Used in synchronizing threads
<code>void finalize()</code>	Called just before an object is garbage collected
<code>Object clone()</code>	Returns a new object that are exactly the same as the current object
<code>int hashCode()</code>	Returns a hash code value for the object.

Example:

```
public class Test

{

public static void main(String[] args)

{

Test t = new Test();

/*hashCode is the unique number generated by JVM*/

System.out.println(t);

System.out.println(t.toString()); // provides String representation of an Object

System.out.println(t.hashCode());
```

```
t = null; /*calling garbage collector explicitly to dispose system resources, perform  
clean-up activities and minimize memory leaks*/
```

```
System.gc();
```

```
System.out.println("end");
```

```
}}
```

```
protected void finalize() // finalize() is called just once on an object
```

```
{
```

```
System.out.println("finalize method called");
```

```
}
```

```
} end
```

Sample Output:

Test@2a139a55

Test@2a139a55

705927765

end

finalize method

called

Abstract Classes And Methods

Abstract class

A class that is declared as abstract is known as **abstract class**. It can have **abstract and non-abstract methods** (method with body). It needs to be extended and its method implemented.

It cannot be instantiated.

Syntax:

```
abstract class classname
```

```
{
```

```
}
```

Abstract method

- A method that is declared as abstract and does not have implementation is known as abstract method. The method body will be defined by its subclass.
- Abstract method can never be final and static. Any class that extends an abstract class must implement all the abstract methods declared by the super class.
- *Note:*
- A normal class (non-abstract class) cannot have abstract methods.
- *Syntax:*
- `abstract returntype functionname (); //No definition`

Syntax for abstract class and method:

```
modifier abstract class className
{
//declare fields
//declare methods
abstract dataType methodName();
}
modifier class childClass extends className
{
dataType methodName()
{
}
}
```


Rules

1. Abstract classes are not Interfaces.
2. An abstract class may have concrete (complete) methods.
3. An abstract class may or may not have an abstract method. But if any class has one or more abstract methods, it must be compulsorily labeled abstract.
4. Abstract classes can have Constructors, Member variables and Normal methods.
5. Abstract classes are never instantiated.

Cont.,

6. For design purpose, a class can be declared abstract even if it does not contain any abstract methods.
7. Reference of an abstract class can point to objects of its sub-classes thereby achieving run-time polymorphism Ex: `Shape obj = new Rectangle();`
8. A class derived from the abstract class must implement all those methods that are declared as abstract in the parent class.
9. If a child does not implement all the abstract methods of abstract parent class, then the child class must need to be declared abstract as well.

Example 1

```
//abstract parent class
abstract class Animal
{
//abstract method
public abstract void sound();
}
//Lion class extends Animal class
public class Lion extends Animal {
public void sound() {
System.out.println("Roars");
}
public static void main(String args[]){
Animal obj = new Lion();
obj.sound();
}
}
```

Output:

Roars

In the above code, Animal is an abstract class and Lion is a concrete class.

Final Methods and Classes

- The final keyword in java is used to restrict the user. The java final keyword can be applied to:
 - variable
 - method
 - class

Uses of final in java:

- Java final variable - To prevent constant variables
- Java final method - To prevent method overriding
- Java final class - To prevent inheritance

Java final variable

The final keyword can be applied with the variables, a final variable that have no value it is called blank final variable or uninitialized final variable. It can be initialized in the constructor only. The blank final variable can be static also which will be initialized in the static block only.

Blank final variable

A final variable that is not initialized at the time of declaration is known as blank final variable. We must initialize the blank final variable in constructor of the class otherwise it will throw a compilation error.

Java Final Method

- A Java method with the final keyword is called a final method and it cannot be overridden in the subclass.
- In general, final methods are faster than non-final methods because they are not required to be resolved during run-time and they are bonded at compile time.

Points to be remembered while using final methods:

- Private methods of the superclass are automatically considered to be final.
- Since the compiler knows that final methods cannot be overridden by a subclass, so these methods can sometimes provide performance enhancement by removing calls to final methods and replacing them with the expanded code of their declarations at each method call location.
- Methods made inline should be small and contain only few lines of code. If it grows in size, the execution time benefits become a very costly affair.
- A final's method declaration can never change, so all subclasses use the same method implementation and call to one can be resolved at compile time. This is known as *static*

binding.

Java Final Class

- Final class is a class that cannot be extended i.e. it cannot be inherited.
- A final class can be a subclass but not a superclass.
- Declaring a class as final implicitly declares all of its methods as final.
- It is illegal to declare a class as both abstract and final since an abstract class is incomplete by itself and relies upon its subclasses to provide complete implementations.
- Several classes in Java are final e.g. String, Integer, and other wrapper classes.
- The final keyword can be placed either before or after the access specifier.

Final class Syntax

```
final public class A  
{  
    //code  
}
```

OR

```
public final class A  
{  
    //code  
}
```


Interfaces

- An interface is a reference type in Java. It is similar to class. It is a collection of abstract methods. Along with abstract methods, an interface may also contain constants, default methods, static methods, and nested types. Method bodies exist only for default methods and static methods.

An interface is similar to a class in the following ways:

- An interface can contain any number of methods.
- An interface is written in a file with a .java extension, with the name of the interface matching the name of the file.
- The byte code of an interface appears in a .class file.
- Interfaces appear in packages, and their corresponding bytecode file must be in a directory structure that matches the package name.

Contd.,

Uses of interface:

- Since java does not support multiple inheritance in case of class, it can be achieved by using interface.
- It is also used to achieve loose coupling.
- Interfaces are used to implement abstraction.

Defining an Interface

An interface is defined much like a class.

Syntax:

```
Access specifier interface interface name
{
return-type method-name1(parameter-list);
return-type method-name2(parameter-list);
type final-varname1 = value;
type final-varname2 = value;
// ...
return-type method-nameN(parameter-list);
type final-varnameN = value;
}
```

CONT.,

- When no access specifier is included, then default access results, and the interface is only available to other members of the package in which it is declared. When it is declared as public, the interface can be used by any other code.
- The java file must have the same name as the interface.
- The methods that are declared have no bodies. They end with a semicolon after the parameter list. They are abstract methods; there can be no default implementation of any method specified within an interface.
- Each class that includes an interface must implement all of the methods.
- Variables can be declared inside of interface declarations. They are implicitly final and static, meaning they cannot be changed by the implementing class. They must also be initialized.
- All methods and variables are implicitly public.

Sample Code:

- The following code declares a simple interface Animal that contains two methods called eat() and travel() that take no parameter.

```
/* File name : Animal.java */
```

```
interface Animal
```

```
{
```

```
public void eat();
```

```
public void travel();
```

```
}
```

Implementing an Interface

Once an interface has been defined, one or more classes can implement that interface. To implement an interface, the 'implements' clause is included in a class definition and then the methods defined by the interface are created.

Syntax:

```
class classname [extends superclass] [implements interface [,interface...]]  
  
{  
  
// class-body  
  
}
```

Properties of java interface

- If a class implements more than one interface, the interfaces are separated with a comma.
- If a class implements two interfaces that declare the same method, then the same method will be used by clients of either interface.
- The methods that implement an interface must be declared public.
- The type signature of the implementing method must match exactly the type signature specified in the interface definition.

Rules

- A class can implement more than one interface at a time.
- A class can extend only one class, but can implement many interfaces.
- An interface can extend another interface, in a similar way as a class can extend another class.

Sample Code 1:

The following code implements an interface Animal shown earlier.

```
/* File name : MammalInt.java */  
public class Mammal implements Animal  
{  
    public void eat()  
    {  
        System.out.println("Mammal eats");  
    }  
    public void travel()  
    {  
        System.out.println("Mammal travels");  
    }  
    public int noOfLegs()  
    {  
        return 0;  
    }  
}
```



```
public static void main(String args[])  
  
{  
  
Mammal m = new Mammal();  
  
m.eat();  
  
m.travel();  
  
} }
```

Output:

Mammal eats

Mammal travels

It is both permissible and common for classes that implement interfaces to define additional members of their own. In the above code, Mammal class defines additional method called noOfLegs().

Sample Code 2:

The following code initially defines an interface ‘Sample’ with two members. This interface is implemented by a class named ‘testClass’.

```
import java.io.*;

// A simple interface interface Sample
{
final String name = “Shree”;
void display();
}

// A class that implements interface. public class testClass implements Sample
{
public void display()
{
System.out.println(“Welcome”);
}
}
```

```
public static void main (String[] args)
{
testClass t = new testClass();
t.display();
System.out.println(name);
}
}
```

Output:
Welcome
Shree

nested Interface

An interface can be declared as a member of a class or another interface. Such an interface is called a member interface or a nested interface. A nested interface can be declared as public, private, or protected.

Sample Code:

```
interface MyInterfaceA
{
void display();
interface MyInterfaceB
{
void myMethod();
} }
}
```

```
public class NestedInterfaceDemo1 implements MyInterfaceA.MyInterfaceB
{
public void myMethod()
{
System.out.println("Nested interface method");
}
public static void main(String args[])
{
MyInterfaceA.MyInterfaceB obj= new NestedInterfaceDemo1();
obj.myMethod();
}
}
```

Output:

Nested interface method

Differences Between Class and Interface

Both classes and Interfaces are used to create new reference types. A class is a collection of fields and methods that operate on fields. A class creates reference types and these reference types are used to create objects. A class has a signature and a body. The syntax of class declaration is shown below:

```
class class_Name extends superclass implements interface_1,....interface_n
```

```
// class signature
```

```
{
```

```
//body of class.
```

```
}
```

Signature of a class has class's name and information that tells whether the class has inherited another class.

The body of a class has fields and methods that operate on those fields. A Class is created using a keyword

Differences Between Class and Interface

aspect for comparison	class	Interface
basic	A class is instantiated to create objects.	An interface can never be instantiated as the methods are unable to perform any action on invoking.
Keyword	class	Interface
access specifier	The members of a class can be private, public or protected.	The members of an interface are always public.
Methods	The methods of a class are defined to perform a specific action.	The methods in an interface are purely abstract.
inheritance	A class can implement any number of interfaces and can extend only one class.	An interface can extend multiple interfaces but cannot implement any interface.
Inheritance keyword	extends	implements
constructor	A class can have constructors to initialize the variables.	An interface can never have a constructor as there is hardly any variable to initialize.
declaration syntax	<pre>class class_Name { //fields //Methods }</pre>	<pre>Interface interface_Name { Type var_name=value; Type method1(parameter-list); Type method2(parameter-list); .. }</pre>

The following example shows that a class that implements one interface:

```
public interface interface_example
{
public void method1();
public string method2();
}

public class class_name implements interface_example
{
public void method1()
{
..
}

public string method2()
{
...
} }
}
```


Inheritance between concrete (non-abstract) and abstract classes use extends keyword.

It is possible to extend only one class to another. Java does not support multiple inheritance. However, multilevel inheritance i.e., any number of classes in a ladder is possible. For example, in the following code class C extends the class B, where the class B extends class A.

```
class A { }
```

```
class B extends A { }
```

```
class C extends B { }
```

Inheritance between classes (including abstract classes) and interfaces, use implements keyword.

To support multiple inheritance, it uses interfaces. So after implements keyword, there can be any number of interfaces. For example, in the following code, class B extends only one class A and two interfaces I1 and I2.

```
interface I1 { } interface I2 { } class A
class B extends A implements I1, I2
{
}
```

Inheritance between two interfaces, is possible with the use of extends keyword only.

For example, in the following code, interface I2 extends the interface I1.

```
interface I1 { }
interface I2 extends I1 { }
```

Object cloning

Object cloning refers to creation of exact copy of an object. It creates a new instance of the class of current object and initializes all its fields with exactly the contents of the corresponding fields of this object. In Java, there is no operator to create copy of an object. Unlike C++, in Java, if we use assignment operator then it will create a copy of reference variable and not the object. This can be explained by taking an example. Following program demonstrates the same.

```
// Java program to demonstrate that assignment operator creates a new reference to same object.
```

```

import java.io.*;
class sample{
int a; float b; sample(){
a = 10;
b = 20;
} }

class Mainclass {

public static void main(String[] args){

sample ob1 = new sample();

System.out.println(ob1.a + “ “ + ob1.b);

sample ob2 = ob1;

ob2.a = 100; System.out.println(ob1.a+” “+ob1.b);

System.out.println(ob2.a+” “+ob2.b);

} }

```

Output:
10 20.0
100 20.0
100 20.0

creating a copy using clone() method

The class whose object's copy is to be made must have a public clone method in it or in one of its parent class.

- Every class that implements clone() should call super.clone() to obtain the cloned object reference.
- The class must also implement java.lang.Cloneable interface whose object clone we want to create otherwise it will throw CloneNotSupportedException when clone method is called on that class's object.
- Syntax:
- protected Object clone() throws CloneNotSupportedException

```
import java.util.ArrayList;
```

```
class sample1
{
int a, b;
}
class sample2 implements Cloneable {
int c;
int d;
sample1 s = new sample1();
public Object clone() throws CloneNotSupportedException {
return super.clone();
} }
public class Mainclass
{
public static void main(String args[]) throws CloneNotSupportedException
```

```
sample2 ob1 = new sample2();
ob1.c = 10;
ob1.d = 20;
ob1.s.a = 30;
ob1.s.b = 40;
sample2 ob2 = (sample2)ob1.clone();
ob2.d = 100; //Change in primitive type of ob2 will not be reflected in ob1 field
ob2.s.a = 300; //Change in object type field will be reflected in both ob2 and
ob1(shallow copy)
System.out.println(ob1.c + " " + ob1.d + " " + ob1.s.a + " " + ob1.s.b);
System.out.println(ob2.c + " " + ob2.d + " " + ob2.s.a + " " + ob2.s.b);
} }
```

Types of Object cloning

1. Deep Copy
2. Shallow Copy

1.shallow copy

Shallow copy is method of copying an object. It is the default in cloning. In this method the fields of an old object ob1 are copied to the new object ob2. While copying the object type field the reference is copied to ob2 i.e. object ob2 will point to same location as pointed out by ob1. If the field value is a primitive type it copies the value of the primitive type. So, any changes made in referenced objects will be reflected in other object.

Note:

Shallow copies are cheap and simple to make.

2.Deep copy

To create a deep copy of object ob1 and place it in a new object ob2 then new copy of any referenced objects fields are created and these references are placed in object ob2. This means any changes made in referenced object fields in object ob1 or ob2 will be reflected only in that object and not in the other. A deep copy copies all fields, and makes copies of dynamically allocated memory pointed to by the fields. A deep copy occurs when an object is copied along with the objects to which it refers.

//Java program for deep copy using clone()

import java.util.ArrayList;

class Test {

int a, b;

}

class Test2 implements Cloneable {

int c, d;

Test ob1 = new Test();

public Object clone() throws CloneNotSupportedException {

// Assign the shallow copy to new refernce variable t

Test2 t1 = (Test2)super.clone();

t1.ob1 = new Test();

// Create a new object for the field c

// and assign it to shallow copy obtained,

// to make it a deep copy return t1;

} }

```
public class Main
{
public static void main(String args[]) throws CloneNotSupportedException
{
Test2 t2 = new Test2();
t2.c = 10;
t2.d = 20;
t2.ob1.a = 30;
t2.ob1.b = 40;
Test2 t3 = (Test2)t2.clone();
t3.c = 100;
t3.ob1.a = 300;
System.out.println (t2.c + " " + t2.d + " " + t2.ob1.a + " " + t2.ob1.b);
System.out.println (t3.c + " " + t3.d + " " + t3.ob1.a + " " + t3.ob1.b);
} }
```

Output

10 20 30 40

100 20 300 0

Advantages of clone method:

- If we use assignment operator to assign an object reference to another reference variable then it will point to same address location of the old object and no new copy of the object will be created. Due to this any changes in reference variable will be reflected in original object.
- If we use copy constructor, then we have to copy all of the data over explicitly i.e. we have to reassign all the fields of the class in constructor explicitly. But in clone method this work of creating a new copy is done by the method itself. So to avoid extra processing we use object cloning.

nested classes

- In Java, a class can have another class as its member. The class written within another class is called the nested class, and the class that holds the inner class is called the outer class.
- Java inner class is defined inside the body of another class. Java inner class can be declared private, public, protected, or with default access whereas an outer class can have only public or default access. The syntax of nested class is shown below:

```
class Outer_Demo {
```

```
class Nested_Demo {
```

```
} }
```

Types of nested classes

➤ There are two types of nested classes in java. They are non-static and static nested classes. The non-static nested classes are also known as inner classes.

- Non-static nested class (inner class)
 - Member inner class
 - Method Local inner class
 - Anonymous inner class
- Static nested class

type	description
Member Inner Class	A class created within class and outside method.
Anonymous Inner Class	A class created for implementing interface or extending class. Its name is decided by the java compiler.
Method Local Inner Class	A class created within method.
Static Nested Class	A static class created within class.
Nested Interface	An interface created within class or interface.

Inner classes (non-static nested classes)

- Inner classes can be used as the security mechanism in Java. Normally, a class cannot be related with the access specifier **private**. However if a class is defined as a member of other class, then the inner class can be made private. This class can have access to the private members of a class.

The three types of inner classes are

- Member Inner Class
- Method-local Inner Class
- Anonymous Inner Class

Member Inner class

- The Member inner class is a class written within another class. Unlike a class, an inner class can be private and once you declare an inner class private, it cannot be accessed from an object outside the class.

The following program is an example for member inner class.

```
class Outer_class
{
int n=20;
private class Inner_class { public void display()
{
System.out.println("This is an inner class");
System.out.println("n:" +n);
}
```

```
void print_inner()
{
    Inner_class inn = new Inner_class();
    inn.display();
}

public class Myclass
{
    public static void main(String args[])
    {
        Outer_class out= new Outer_class();
        out.print_inner();
    }
}
```

Output:

This is an inner class

Method-local Inner class

- In Java, a class can be written within a method. Like local variables of the method, the scope of the inner class is restricted within the method. A method-local inner class can be instantiated only within the method where the inner class is defined. The following program shows how to use a method-local inner class.
- The following program is an example for Method-local Inner Class

```
public class Outer_class
{
    void Method1()
    {
        int n = 100;
        class MethodInner_class {
            public void display() {
                System.out.println("This is method inner class ");
                System.out.println("n:" + n);
            }
        }
    }
}
```

```
MethodInner_class inn= new MethodInner_class();  
inn.display();  
}  
public static void main(String args[])  
{  
Outer_class out = new Outer_class();  
out.Method1();  
}  
}
```

Output:

This is method inner class

n: 100

Anonymous Inner class

- An inner class declared without a class name is known as an anonymous inner class. The anonymous inner classes can be created and instantiated at the same time. Generally, they are used whenever you need to override the method of a class or an interface. The syntax of an anonymous inner class is as follows –

```
abstract class Anonymous_Inner  
{  
    public abstract void Method1();  
}
```

The following program is an example for anonymous inner class.

```
public class Outer_class {  
    public static void main(String args[])  
    {  
        Anonymous_Inner inn = new Anonymous_Inner()  
    {  
        public void Method1()  
        {  
            System.out.println("This is the anonymous inner class");  
        }  
    };  
        inn.Method1();  
    }  
}
```

Output:

This is the anonymous inner class

Static nested class

- A static inner class is a nested class which is a static member of the outer class. It can be accessed without instantiating the outer class, using other static members. Just like static members, a static nested class does not have access to the instance variables and methods of the outer class. Instantiating a static nested class is different from instantiating an inner class. The following program shows how to use a static nested class.

```
public class Outer_class
{
    static class inner_class
    {
        public void Method1()
        {
            System.out.println("This is the nested class");
        }
    }
}
```

```
public static void main(String args[])
{
Outer_class.inner_class obj = new Outer_class.inner_class();
obj.Method1();
} }
```

Output:

This is the nested class

Advantage of java inner classes:

There are basically three advantages of inner classes in java. They are as follows:


- Nested classes represent a special type of relationship that is it can access all the members of outer class including private.
- Nested classes are used to develop more readable and maintainable code because it logically group classes and interfaces in one place only.
- It provides code optimization. That is it requires less code to write.

Array list

- ArrayList is a part of collection framework. It is present in java.util package. It provides us dynamic arrays in Java. Though, it may be slower than standard arrays but can be helpful in programs where lots of manipulation in the array is needed.
- ArrayList inherits AbstractList class and implements List interface.
- ArrayList is initialized by a size; however the size can increase if collection grows or shrink if objects are removed from the collection.
- Java ArrayList allows us to randomly access the list.
- ArrayList cannot be used for primitive types, like int, char, etc.
- ArrayList in Java is much similar to vector in C++.

Java arraylist class

- Java ArrayList class extends AbstractList class which implements List interface. The List interface extends Collection and Iterable interfaces in hierarchical order.

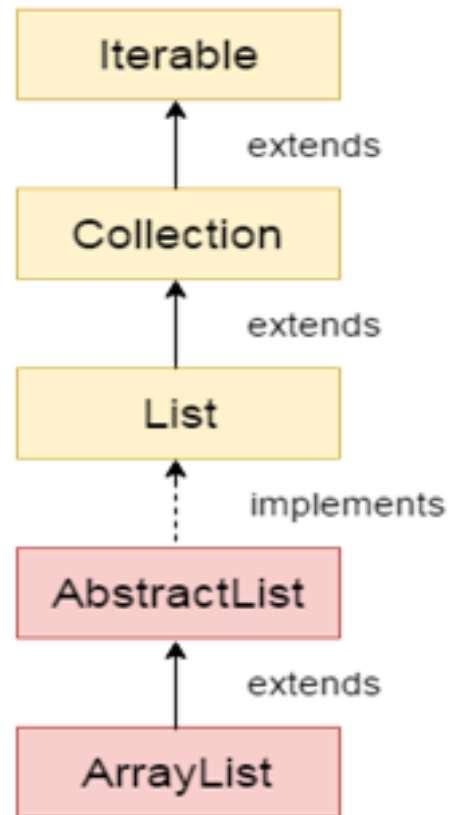

➤ Java ArrayList class uses a dynamic array for storing the elements. It inherits AbstractList class and implements List interface.

The important points about Java ArrayList class are:

- Java ArrayList class can contain duplicate elements.
- Java ArrayList class maintains insertion order.
- Java ArrayList class is non synchronized.
- Java ArrayList allows random access because array works at the index basis.
- In Java ArrayList class, manipulation is slow because a lot of shifting needs to be occurred if any element is removed from the array list.

Arraylist class declaration

```
public class ArrayList<E> extends AbstractList<E> implements List<E>,  
RandomAccess, Cloneable, Serializable
```

Constructors of java arraylist

constructor	description
ArrayList()	It is used to build an empty array list.
ArrayList(Collection c)	It is used to build an array list that is initialized with the elements of the collection c.
ArrayList(int capacity)	It is used to build an array list that has the specified initial capacity.

Methods of java arraylist

Method	Description
void add(int index, Object element)	It is used to insert the specified element at the specified Position index in a list.
boolean addAll(Collection c)	It is used to append all of the elements in the specified collection to the end of this list, in the order that they are returned by the specified collection's iterator.
void clear()	It is used to remove all of the elements from this list.
int lastIndexOf(Object o)	It is used to return the index in this list of the last occurrence of the specified element, or -1 if the list does not contain this element.
Object[] toArray()	It is used to return an array containing all of the elements in this list in the correct order.
Object[] toArray (Object[] a)	It is used to return an array containing all of the elements in this list in the correct order.
boolean add(Object o)	It is used to append the specified element to the end of a list.
boolean addAll(int index, Collection c)	It is used to insert all of the elements in the specified collection into this list, starting at the specified position.
Object clone()	It is used to return a shallow copy of an ArrayList.
int indexOf(Object o)	It is used to return the index in this list of the first occurrence of the specified element, or -1 if the List does not contain this element.
trimToSize()	It is used to trim the capacity of this ArrayList instance to be the list's current size.

```
import java.util.*;
class Arraylist_example{
public static void main(String args[])
{ ArrayList<String> a1=new ArrayList<String>();
a1.add("Bala");
a1.add("Mala");
a1.add("Vijay");
ArrayList<String> a2=new ArrayList<String>();
a2.add("kala");
a2.add("Banu");
a1.addAll(a2);
Iterator itr=a1.iterator(); while(itr.hasNext())
{
System.out.println(itr.next());
} } }
```

Java string

In general string is a sequence of characters. String is an object that represents a sequence of characters. The `java.lang.String` class is used to create string object. In java, string is basically an object that represents sequence of char values. An array of characters works same as java string. For example:

java string class provides a lot of methods to perform operations on string such as `compare()`, `concat()`, `equals()`, `split()`, `length()`, `replace()`, `compareTo()`, `intern()`, `substring()` etc.

The `java.lang.String` class implements *Serializable*, *Comparable* and *CharSequence* interfaces. The *CharSequence* interface is used to represent sequence of characters. It is implemented by `String`, `StringBuffer` and `StringBuilder` classes. It means can create string in java by using these 3 classes.

The string objects can be created using two ways.

1. By String literal
2. By new Keyword

String literal

Java String literal is created by using double quotes. For Example:

1. `String s="welcome";`

Each time you create a string literal, the JVM checks the string constant pool first. If the string already exists in the pool, a reference to the pooled instance is returned. If string doesn't exist in the pool, a new string instance is created and placed in the pool. For example:

```
String s1="Welcome"; String s2="Welcome";
```

In the above example only one object will be created. Firstly JVM will not find any string object with the value "Welcome" in string constant pool, so it will create a new object. After that it will find the string with the value "Welcome" in the pool, it will not create new object but will return the reference to the same instance. To make Java more memory efficient (because no new objects are created if it exists already in string constant pool).

2. by new keyword

```
String s=new String("Welcome");
```

In such case, JVM will create a new string object in normal (non pool) heap memory and the literal “Welcome” will be placed in the string constant pool. The variable s will refer to the object in heap (non pool).

The java String is immutable i.e. it cannot be changed. Whenever we change any string, a new instance is created. For mutable string, you can use StringBuffer and StringBuilder classes.

The following program explains the creation of strings

```
public class String_Example
{
    public static void main(String args[])
    {
        String s1="java";
        char c[]={ 's', 't', 'r', 'i', 'n', 'g' };
        String s2=new String(c);
        String s3=new String("example");
        System.out.println(s1);
        System.out.println(s2);
        System.out.println(s3);
    }
}
```

• java string class methods

- The java.lang.String class provides many useful methods to perform operations on sequence of char values.

Method	description
char charAt(int index)	returns char value for the particular index
int length()	returns string length
static String format(String format, Object... args)	returns formatted string
static String format(Locale l, String format, Object... args)	returns formatted string with given locale
String substring(int beginIndex)	returns substring for given begin index
String substring(int beginIndex, int endIndex)	returns substring for given begin index and end index
boolean contains(CharSequence s)	returns true or false after matching the sequence of char value
static String join(CharSequence delimiter, CharSequence... elements)	returns a joined string
boolean equals(Object another)	checks the equality of string with object
boolean isEmpty()	checks if string is empty
String concat(String str)	concatinates specified string
String replace(char old, char new)	replaces all occurrences of specified char value

String replace(CharSequence old, Char- Sequence new)	replaces all occurrences of specified CharSequence
static String equalsIgnoreCase(String another)	compares another string. It doesn't check case.
String[] split(String regex)	returns splitted string matching regex
String[] split(String regex, int limit)	returns splitted string matching regex and limit
String intern()	returns interned string
int indexOf(int ch)	returns specified char value index
int indexOf(int ch, int fromIndex)	returns specified char value index starting with given index
int indexOf(String substring)	returns specified substring index
int indexOf(String substring, int fromIndex)	returns specified substring index starting with given index
String toLowerCase()	returns string in lowercase.
String toLowerCase(Locale l)	returns string in lowercase using specified locale.
String toUpperCase()	returns string in uppercase.
String toUpperCase(Locale l)	returns string in uppercase using specified locale.
String trim()	removes beginning and ending spaces of this string.
String valueOf(int value)	converts given type into string. It is over- loaded

The following program is an example for String concat function:

```
class string_method{  
public static void main(String args[])  
{  
String s="Java";  
s=s.concat(" Programming");  
System.out.println(s);  
}  
}
```

Output:

Java Programming